




**A-LOCK**  
CYLINDRICAL LOCKSETS  
No. 7000 Series  
No. 7300 Series

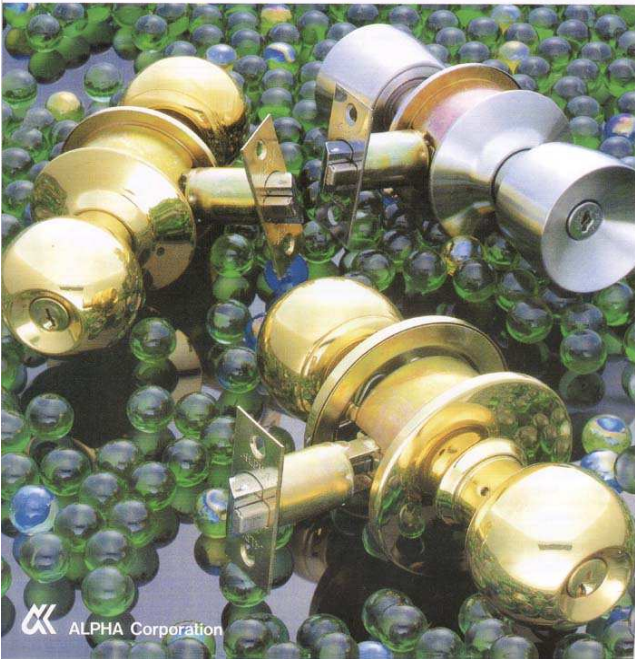

## "ALPHA" BRAND CYLINDRICAL LOCKSETS CERRADURAS CILINDRICAS MARCA "ALPHA"

	FUNCTION	FINISH
70G25-TR-US32D	ENTRANCE	ST.ST.
70U65-TR-US32D	BATH	ST.ST.
70G25-BR-US32D	ENTRANCE	ST.ST.
70U65-BR-US32D	BATH	ST.ST.
70G25-SR-US32D	ENTRANCE	ST.ST.
70U65-SR-US32D	BATH	ST.ST.
70G25-SR-US3	ENTRANCE	B.P.
70U65-SR-US3	BATH	B.P.
70G25-SR-US5	ENTRANCE	A.B.
70U65-SR-US5	BATH	A.B.
70G25-SR-US11	ENTRANCE	A.C.
70U65-SR-US11	BATH	A.C.
73G26-SR-US32D	DOUBLE-CYL	ST.ST.
73G26-SR-US3	DOUBLE-CYL	B.P.
73G26-SR-US5	DOUBLE-CYL	A.B.
73G26-SR-US11	DOUBLE-CYL	A.C.

### A-LOCK No. 7000/7300 Series



#### Specifications


Backset: 60 mm (2 3/8"), 70 mm (2 3/4")  
 Door thickness: 28 mm to 45 mm (1 1/8" to 1 7/8")  
 Front plate: Stainless steel, brass, 25.4 mm x 57 mm (1" x 2 1/4")

Strike: Electro-plated steel  
 Latch bolt: Chrome-plated, die-cast zinc  
 Keys: Nickel-plated brass  
 Water & Humidity (No. 7000 Series)  
 Cylinders: 5 pin tumbler (No. 7300 Series)

Knobs: Stainless steel, brass, die-cast zinc  
 Roses: Stainless steel, brass  
 Key arrangements: KD, KA, or MK

#### Available Finishes:

US32D  
 US32  
 US3D  
 US3  
 US11Z  
 US5Z  
 US11P  
 US5P  
 US10B

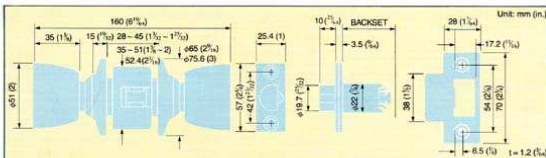

### 6 Outstanding Variations for the Privacy You Require

Function	Design	Application	Operation
G25	Outside: [Diagram] Inside: [Diagram]	<ul style="list-style-type: none"> <li>Entrances</li> <li>Offices</li> <li>Private rooms</li> <li>Many other doors</li> </ul>	To lock the door from inside, press the inside button. To unlock, simply turn the inside knob. When locked from inside, the outside knob is also locked. From outside, use a key to unlock. The inside button can be held in locked position by turning it clockwise to horizontal. The latch bolt automatically disables when the door is closed. A guard bolt prevents prying the latch bolt back.
G04	[Diagram]	<ul style="list-style-type: none"> <li>Storerooms</li> <li>Various facilities</li> </ul>	Since the outside knob is fixed, the door is automatically locked when closed. To unlock from outside, use the key. To open the door from inside, simply turn the inside knob which is always free.
G37	[Diagram]	<ul style="list-style-type: none"> <li>Classrooms</li> <li>Sickrooms</li> </ul>	Use the key to lock/unlock from outside. The inside knob is always free to open the door as there is control for locked from inside. To lock from outside: (1) Insert the key and turn it 180 degrees clockwise. (2) Turn the key back to the initial position. (3) Pull up the key. To unlock, turn the inserted key 90 degrees counter-clockwise. (Available with 7300 series only)
U65	[Diagram]	<ul style="list-style-type: none"> <li>Bathrooms</li> <li>Other private rooms</li> </ul>	Press the inside button to lock the outside knob. Unlock from inside by simply turning the knob. In an emergency, turn the outside knob slot with a coin or screwdriver to open the door from outside.
U15	[Diagram]	<ul style="list-style-type: none"> <li>Passages</li> </ul>	These knobs have no locking mechanism. Use for passage doors which do not need locking.
G38	[Diagram]	<ul style="list-style-type: none"> <li>Storerooms</li> <li>Closets</li> </ul>	This lock kit is useful where clearance is not enough for regular knobs. Locked or unlocked by key from outside. Unlocked by turning both handles.

#### When ordering

Please specify items in the following coding:

Series	Function	Design	Finish
70 73	G25	TR	US32D
No. 7000 (Water Cylinder) No. 7300 (Pin Cylinder)	Guard Bolt Entrance Universal Button	Tulip Knobs with Round Roses	Stainless Steel Satin Finish



with "Big Roses"  $\phi 75$  mm (3")


### NOTES:

- TR TULIP KNOB
- BR BRANDY WINE KNOB
- SR SPHERICAL KNOB



**"ALPHA" BRAND W-LOCK**  
NO. 33S05-TRW-US32D

AVAILABLE BACKSETS :    60MM  
   64MM  
   100MM

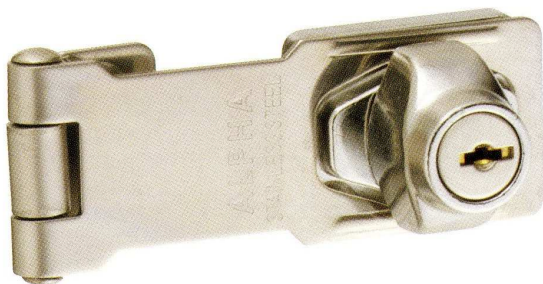

**"ALPHA" BRAND ST. STEEL**  
**HASP LOCK**

NO. 2550-60MM  
NO. 2550-75MM  
NO. 2550-95MM  
NO. 2550-100MM



**"ALPHA" BRAND PUSH LOCKS**

NO. 503  
NO. 503B



**"ALPHA" BRAND**  
**AUXILIARY LOCK**

NO. 570  
NO. 570SAS